



**LED Model #**

DW-O

Wall/Ceiling/Cabinet/Shelf/Floor, Recess into Insulated Cavity (IC Rated) Model DW Indoor/Damp (Wet Location w/ Hood) DW-O

**Wattage**

1.5 Watt (Standard) 3 Watt (3) Optional Call for all other wattages

**Finish**

Natural/Aluminum (Standard) Powder Coated Black (BK), White (WH), Other Color, Other Finishes By Request

**LED Color**

Cool White (WH), Warm White (WW), Blue (BL), Red (RD), Cyan (CY), Green (GN), Amber (AM), Other

**Options**

+Z (Zener Diode), Hood (H), Integral Driver/Box, Beam Spreads by Request.

**Feed with Remote Power Pack (RPK) - Standard**



LED "Dimple" Light can Recess into Insulated Cavity (IC Rated). Drill Hole, Pull Wire, Push into Place. Hood Required for Wet Locations. Clearances Not Required.

Standard "Dimple" uses approximately 1.5 Watts. Standard Beam Spread: 10 degrees



Call for Photometrics – Other Beam spreads by Request

Call for Custom Options and Powering Requirements

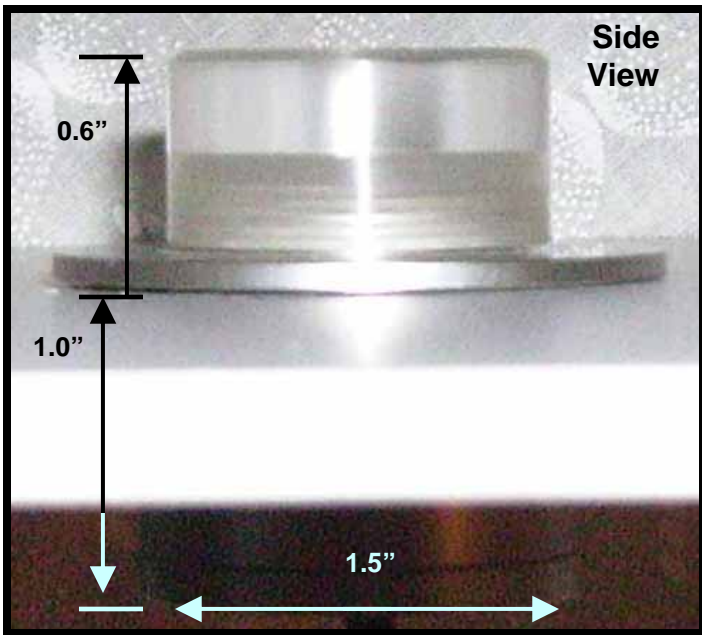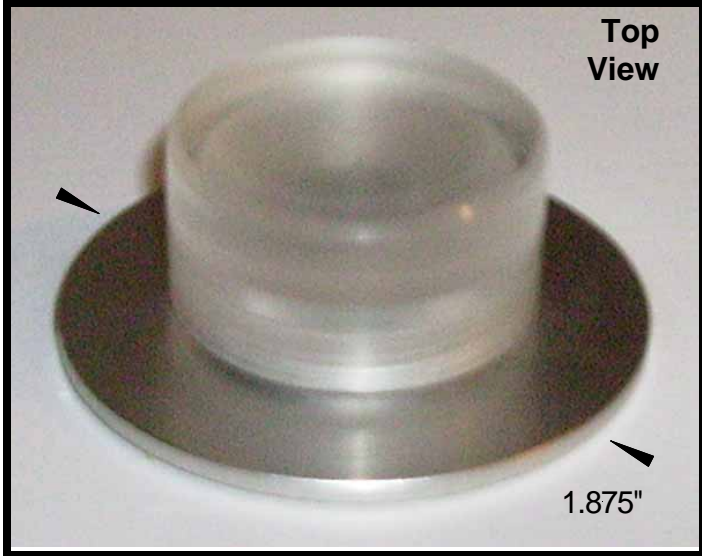

Project

Type/Location