

LED Model: SAL


- Powered by RPK (Remote Driver)
- Class 2 device; low current and low voltage feed
- IC Rated, Clearances NOT Required
- Power/Wattage: 1.5 watt High Power LEDs
- 5 Year Warranty – Made in USA
- Safe for Children, Animals, Clothes, Valuables
- 50,000 Hour Minimum Half Expected
- No Heat or UV from Light Beam
- Energy Efficient + Environment Friendly
- Durable; No Maintenance; No Filament to Break
- Call for Photometrics; 10 degree Optic Standard
- Optional Mounting + Aiming tabs available
- Optional J-Box Mounting Plate available for rear entry
- Optional 30 degree Tilt on Center Axis (+ T)
- Gasketed for Outdoor Mounting (+ G)
- Optional Zener Diodes (+Z) Recommended



1. Base/Channel
2. Wiring Compartments - Position Up or down as preferred
3. LED Strip - Optics (10 degree Beam standard) Optional
4. Lens (Linear Spread Optional)

LED MODEL <input type="text" value="SAL"/>	Indoor/Damp Dimmable Linear LED System 1.5" Channel + 1/4" flange each side = 2" width 1" Channel Height (w/o lens) standard
LENGTH + <input type="text"/>	Overall Length (inches), then Add B (Wiring Box on One end) BB (Wiring Box on Both ends)
LENS <input type="text"/>	Clear Lexan (Standard) Frosted Lexan (F) Linear Beam Spread Wide (LW) Linear Beam Spread Narrow (LN)
LEDs PER FT + <input type="text"/>	6 LEDs per foot Maximum, then Add N (NO Optics) – 120 degree Beam Standard P (Optics) – 10 degree Beam Standard P/Beam ("Beam" specified)
LED COLOR <input type="text"/>	COOL White (WH), Amber (AM), Blue (BL), Red (RD), Cyan (CY), Green (GN), WARM White (WW), Zener Diode Option (+Z) Call for Other or Mixed (MX)

Illustrated Model #: SAL-18BB-F-6P-WW
Call for Custom colors and voltages

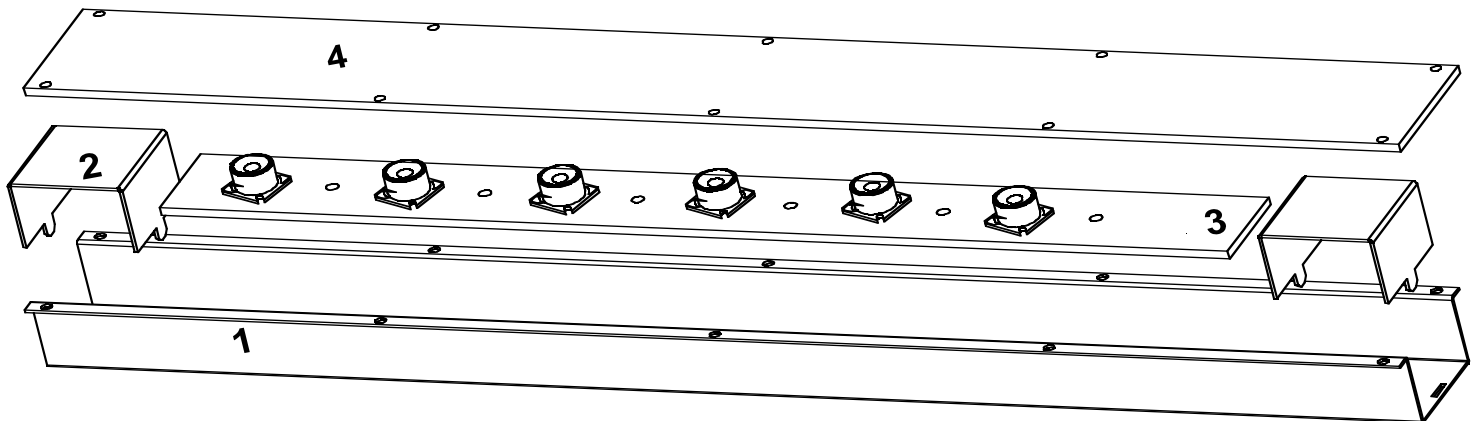

www.GeminiOneFive.com
800.660.2320

REPRESENTED BY:

LED Model: HK

- Independently Dimmable LED Fixture
- Mounts into Outlet Box (Call for specifics)
- Wiring Box Supplied Upon Request
- Designed to accept Plastic Faceplate by others
- Mounts in Vertical or Horizontal Position
- Adjustable in Vertical and Horizontal Position
- Class 2 device; low current and low voltage feed
- IC Rated, Clearances NOT Required
- Power/Wattage: 1.5 watt High Power LEDs
- 5 Year Warranty – Made in USA
- Safe for Children, Animals, Clothes, Valuables
- 50,000 Hour Minimum Half Expected
- No Heat or UV from Light Beam
- Energy Efficient + Environment Friendly
- Durable; No Maintenance; No Filament to Break
- Call for Photometrics
- +G (Gasketed for Outdoor Use)
- 1 LED Standard; 2 LEDs Optional (HK2)



Call for Custom colors and voltages
* Not stocked - built to order only



LED MODEL HK	Indoor/Damp
FACE PLATE <input type="text"/>	NONE (Standard) Flanged (FD), Flush (FH)
FACE PLATE <input type="text"/>	NONE (Standard) Black (BK)*, White (WH)*, Natural (AL)*, Other (Specify)
FACE PLATE <input type="text"/>	NONE (Standard), Other (Specify), Chamfered (CH), Louvered Vertical (LV)*, Hooded Vertical (HV)*, Louvered Horizontal (LH)*, Hooded Horizontal (HH)*
LENS <input type="text"/>	Clear (Standard) Frosted (F), Other (Specify)
VOLTAGE IN <input type="text"/>	Remote Driver (Standard) 12 Volts (12), Other (Specify)
LED COLOR <input type="text"/>	COOL White (WH), Amber (AM), Blue (BL), Red (RD), Cyan (CY), Green (GN), WARM White (WW), Other (Specify), Zener Diode Option (+Z)
OPTIONS <input type="text"/>	Z (Zener Diode Option) 10D (10 Degree Optic) 25D (25 Degree Optic) 40D (40 Degree Optic) X (Include New Construction Wiring Box) R (Include Remodeler Wiring Box) Other (Specify)



www.GeminiOneFive.com
800.660.2320

REPRESENTED BY: